


## CAS-2SC

2 Door Slave Access Control Module

### Features

- Support 20,000 valid cards & 30,000 records
- Support multiple cards
- Support card, password, fingerprint and combination
- Only work with ASC2204-H with CAN bus
- Wiegand or RS-485 interface to readers
- Door time out alarm, intrusion alarm, duress alarm and tamper alarm
- Anti-passback, multi-door interlock, multi-personal open
- Support 128 efficient time and holiday schedules
- Watch dog function ensure device free from halting
- Surface mounted installation

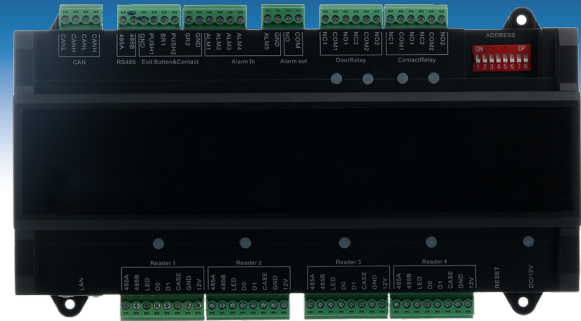

Overhead View



Side View

### Specifications

System	
Main Processor	ARM Cortex M3@120MHz
Memory	16M

Input / Output Ports	
Input	Inputs x 9 ( Door Sensor x 2, Exit Button x 2, Alarm x 5)
Output	Relay x 5 (Door Lock x 2, Sensor Trigger Out x 2, Alarm x 1)
Reader	Reader x 4

Capacity	
Card Holders	20,000
Events	30,000

Function	
Access Control	Anti-pass back, Mult-Interlock, Multi-card unlock
User Management	General, VIP, Guest, Patrol, Black List, Duress
Alarm Function	Door time out alarm, Intrusion alarm, Duress alarm, Tamper alarm
Period	Support 128 groups of schedule, 128 groups of period and 128 groups of holiday period

Interface	
To Master Controller	CAN H, CAN L
To Reader	Wiegand / RS485

General	
RTC	Yes
Power Supply	DC12V/1A
Working Environment	- 22°F~ +140°C
Working Humidity	≤95%
Dimensions (W x D x H)	8.3" x 2" x 4.17"
Weight	1.1 lb

### Related Product