



HDVR44K-Q1-NCV

4 Channel 5-Way 4K MINI-1U DVR with Analytics



4K Over Coax

Record up to 16 channels at 4K video resolutions and H.265 for video compression.



Smart Intrusion Prevention

Significantly reduce false alarms by accurately detection human and vehicle detection in zones.



Audio over Coax


This integrated design helps reduce wiring troubles translating to lower costs

48

Mbps

Bandwidth

Up to 48Mbps, Incoming Bandwidth



H.265

Reduce bit rate and storage requirements by utilizing H.265 compression.

SMART INTRUSION PREVENTION

Utilizing machine learning and data intelligence, Smart Intrusion Prevention or SIP helps reduce false-alarm rates by allowing you to set up Cross Line Detection, Intrusion Detection, as well as Enter / Leave Area, all which can do any combination of human/vehicle/non-motor vehicle recognition. Smart Intrusion Prevention's detection rate of >95% helps you improve your perimeter protection, reduce false alarms while keeping you informed about the events that matter the most to you. Ultra Motion Detection can be configured to your full screen or area detection.

ULTRA MOTION DETECTION

Utilizing machine learning and data intelligence, Ultra Motion Detection or UMD helps you filter out object based on motion detection, detecting motion of specified object types in the image, and trigger an alarm when such motion is detected. UMD supports two different object types: Person and Vehicle. UMD provides a detection rate of >90% up to 49ft and is more efficient than traditional motion detection, further reducing false-alarms.

4K RESOLUTION

4K resolution captures images four times the pixel density of 1080P which means that the finer details, such as faces or smaller items can be viewed with more detail than traditional 1080P surveillance.

H.265 COMPRESSION

Utilizing H.265 advanced video encoding, provides high-quality video while reducing the storage space needed to retain your video events.

HDVR44K-Q1-NCV

4 Channel 5-Way 4K MINI-1U DVR with Analytics



NDAA COMPLIANCE

The John S. McCain National Defense Authorization Act (NDAA) is a United States federal law which specifies the budget, expenditures and policies of the U.S. Department of Defense. For Fiscal Year 2019, the NDAA Section 889, prohibits the U.S. government from procuring video and telecommunication equipment from certain Chinese companies and their subsidiaries. Some non government projects may require NDAA compliance if federal funding is being used.

PRODUCT SPECIFICATIONS

VIDEO / AUDIO INPUT	
Analog Video Input	4-ch, BNC
IP Video Input	2-ch(only IP up to 6ch), each channel up to 4MP
Supported Analog Camera Types	Support AHD input: 8MP @ 15fps, 5MP @ 20fps, 4MP @ 30fps, 1080P @ 30fps, 720P @ 30fps Support TVI input: 8MP @ 15fps, 5MP @ 20fps, 4MP @ 30fps, 1080P @ 30fps, 720P @ 30fps Support CVI input: 8MP @ 15fps, 5MP @ 25fps, 4MP @ 30fps, 1080P @ 30fps, 720P @ 30fps Support CVBS input
Audio Input	1-ch, RCA
Audio Compression	G.711U

VIDEO / AUDIO OUTPUT	
CVBS Output	1-ch, BNC
VGA Output	1920 x 1080p / 60Hz, 1920 x 1080p / 50Hz, 1600 x 1200 / 60Hz, 1280 x 1024 / 60Hz, 1280 x 720 / 60Hz, 1024 x 768 / 60Hz
HDMI Output	3840 x 2160 / 30Hz, 1920 x 1080p / 60Hz, 1920 x 1080p / 50Hz, 1600 x 1200 / 60Hz, 1280 x 1024 / 60Hz, 1280 x 720 / 60Hz, 1024 x 768 / 60Hz
Audio Output	1-ch, RCA
Synchronous Playback	4
Live View Display	HDMI/VGA: 1 / 4 / 6 / 8 / 9
Two-Way Audio	1-ch, RCA

NETWORK	
Incoming Bandwidth	40Mbps (Up to 48Mbps after all analog channel conversion)
Outgoing Bandwidth	48Mbps

NETWORK CONT.	
Remote Users	128
Protocols	TCP/IP, P2P, UPnP, DHCP, HTTP, HTTPS, DNS, DDNS, SMTP
Browser	IE(IE10/11) for Windows Firefox (version 52.0 and above) for Windows Chrome(version 45 and above) for Windows Edge(version 79 and above) for Windows

SMART	
Analog Smart by DVR	Smart Intrusion Prevention, Ultra Motion Detection, Human Detection, Vehicle Detection, Non-Motor Vehicle Detection, Intrusion, Cross Line, Enter Area, Leave Area
VCA Search	Face Search, Behavior Search, People Counting
Smart Functions by DVR	8-ch Ultra Motion Detection, 2-ch Smart Intrusion Prevention

ENCODING	
Recording Resolution	8MP Lite / 5MP / 5MP Lite / 4MP Lite / 1080P / 720P / CIF
Recording Frame Rate	Main stream: 8MP Lite@8fps, 5MP Lite @ 12fps, 4MP Lite @ 15fps, 1080P @ 15fps, 720p @ 30fps Sub stream: D1 @ 8fps, D1 @ 12fps, D1 @ 15fps, D1 @ 15fps, D1 @ 30fps
Audio Sample Rate	8KHz, 16 bit per channel
Audio Bit Rate	64Kbps per channel

DECODING	
Capability	Analog: 4 x 8MP Lite @ 8, 4x 5MP Lite @ 12, 4x 4MP Lite @ 15, 4 x 1080P @ 15 IP: 1 x 4MP @ 30, 2 x 1080P @ 30

HDVR44K-Q1-NCV

4 Channel 5-Way 4K MINI-1U DVR with Analytics



PRODUCT SPECIFICATIONS

HARD DISK	
SATA	1 SATA interface
Capacity	Up to 8TB for each HDD

GENERAL ALARM	
General Alarm	Motion detection

GENERAL ALARM CONT.	
Alert Alarm	IP Conflict, Network Disconnected, Disk Offline, Disk Abnormal, Illegal Access, Hard Disk Space Low, Hard Disk Full, Recording/Snapshot Abnormal

EXTERNAL INTERFACE	
Network Interface	1 RJ45 10M/100M self-adaptive Ethernet Interface
USB Interface	Rear panel: 2 x USB2.0
RS485	1
Alarm In	4-ch
Alarm Out	1-ch

GENERAL	
Power Supply	12V DC Power Consumption: ≤ 10 W
Working Environment	+14°F ~ +131°F, Humidity ≤ 90% RH(non-condensing)
Dimensions	10.2" (W) × 8.9" (D) × 1.8" (H)
Weight	2.42lb

CERTIFICATION	
Certification	UL / CE / FCC / RoHS / WEEE

ADDITIONAL PRODUCTS



OPTIVIEW'S VIDEO MONITORING SOFTWARE
Remote Monitoring



SURVEILLANCE DRIVES
4TB / 8TB



HDCD5MS-28LRA
5MP HD Armor Ball Camera w/ Built-in Mic




HDCB5M-28S
5 MP HD Wide Angle Bullet Camera w/ Mic



HDPTZ4M-30S
4MP HD-over-Coax PTZ Camera with 30X Zoom

BACKPLATE

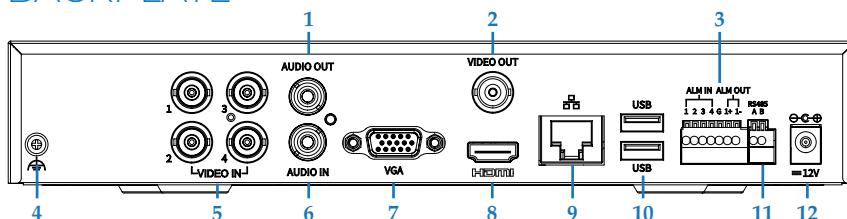

- | | | |
|-----------------------|----------------|----------------------|
| 1. Audio Output | 5. Video Input | 9. Network Interface |
| 2. Video Output | 6. Audio Input | 10. USB 2.0 |
| 3. Alarm Input/Output | 7. VGA Output | 11. RS485 |
| 4. Ground | 8. HDMI Output | 12. DC Power |

HDVR44K-Q1-NCV

4 Channel 5-Way 4K MINI-1U DVR with Analytics



DIMENSIONS

